
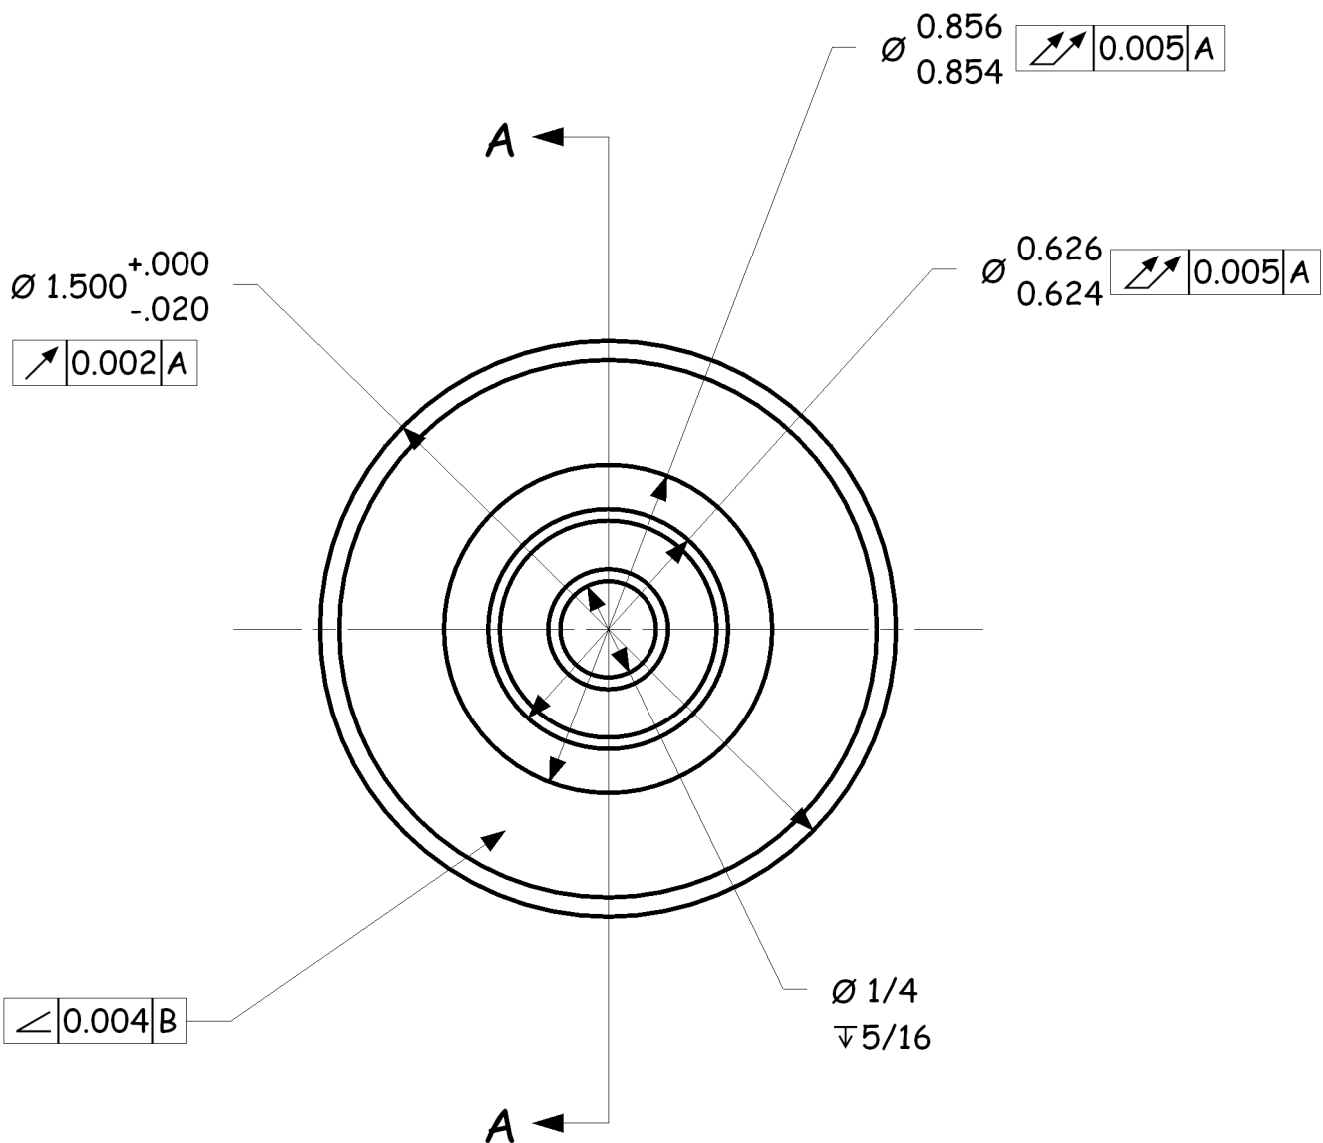
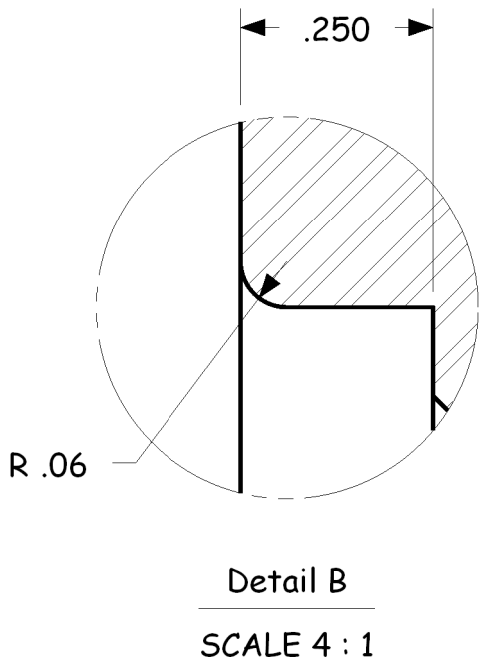
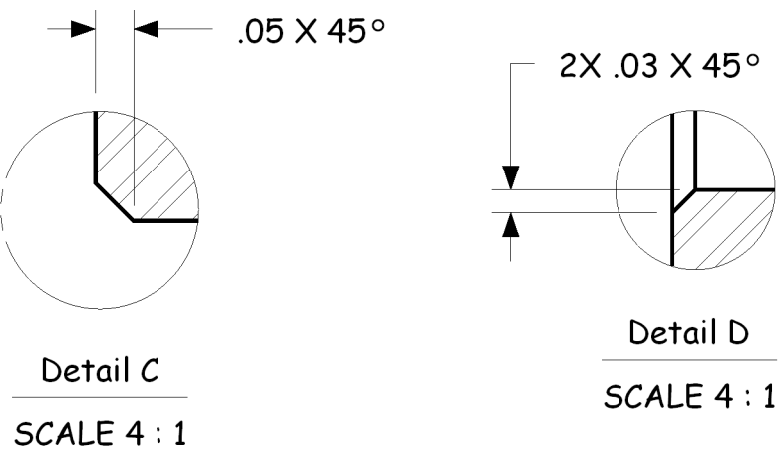
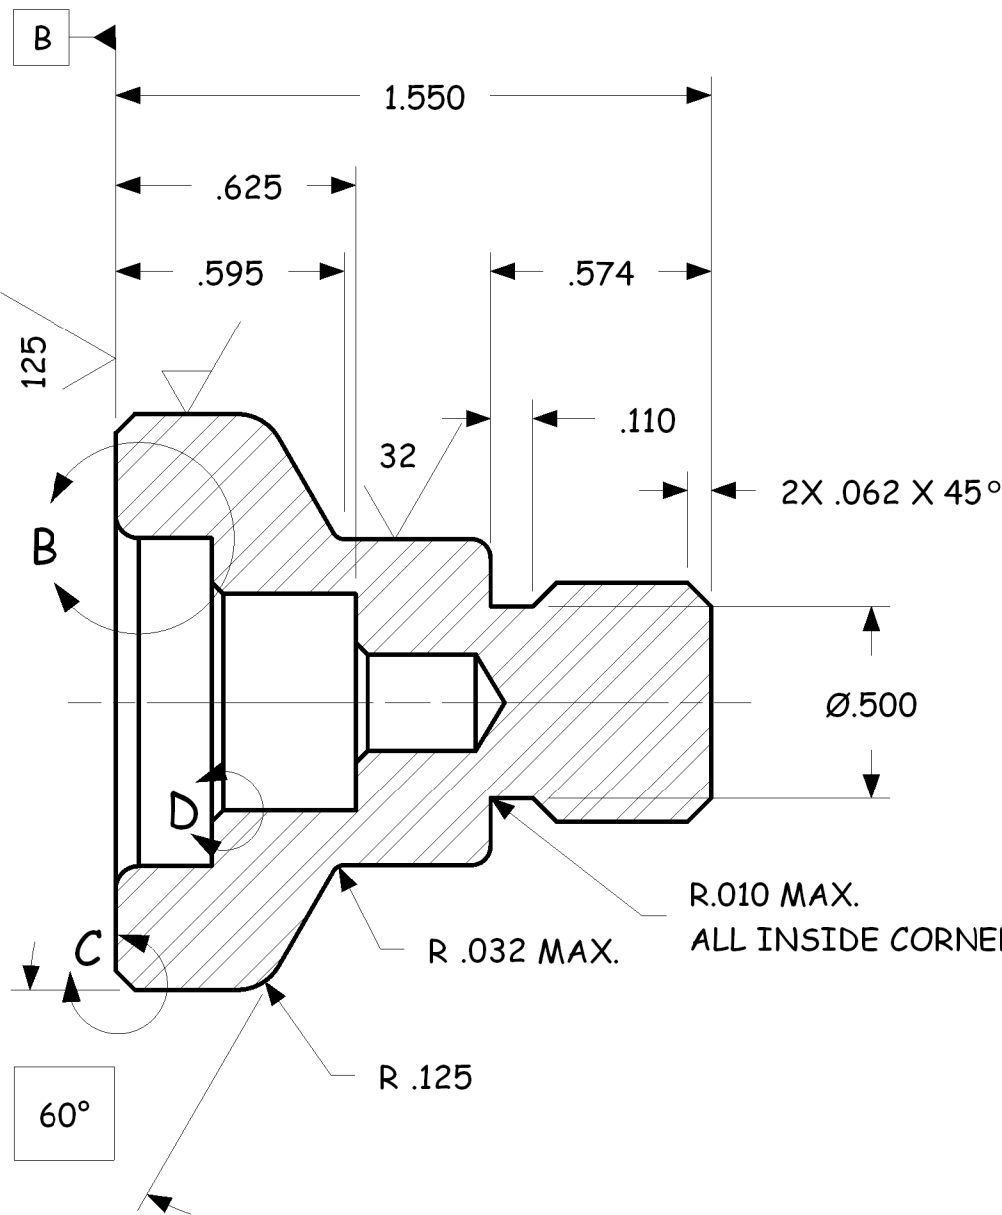
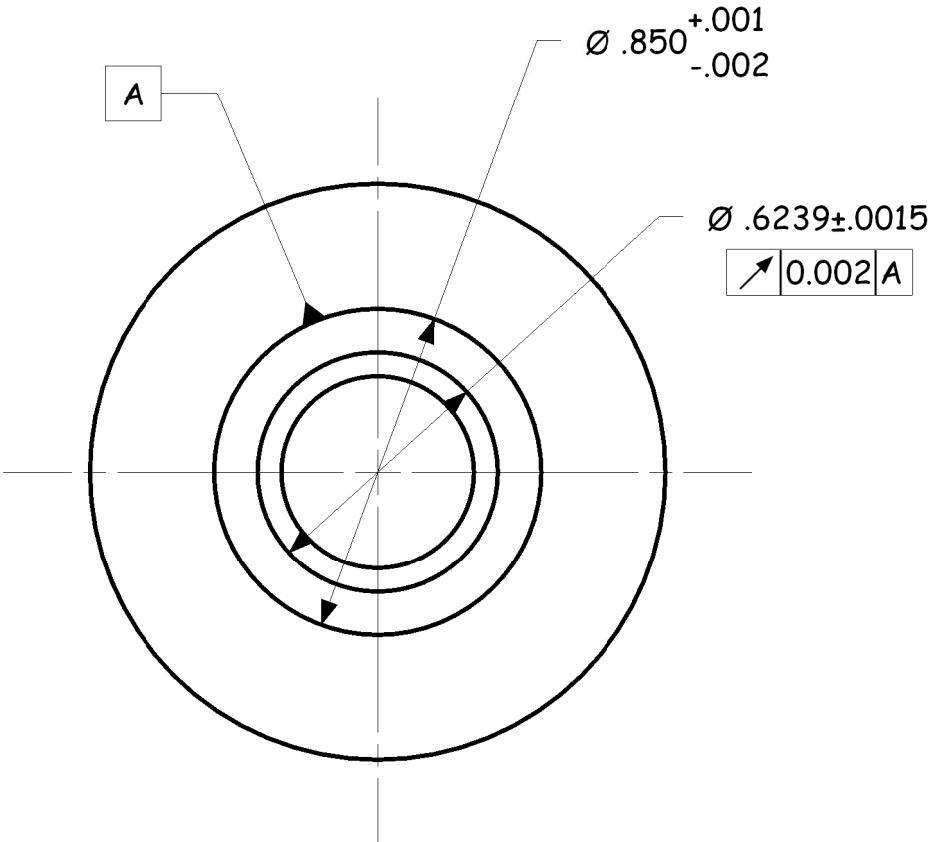



REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	9/9/2008	D. Duplessis

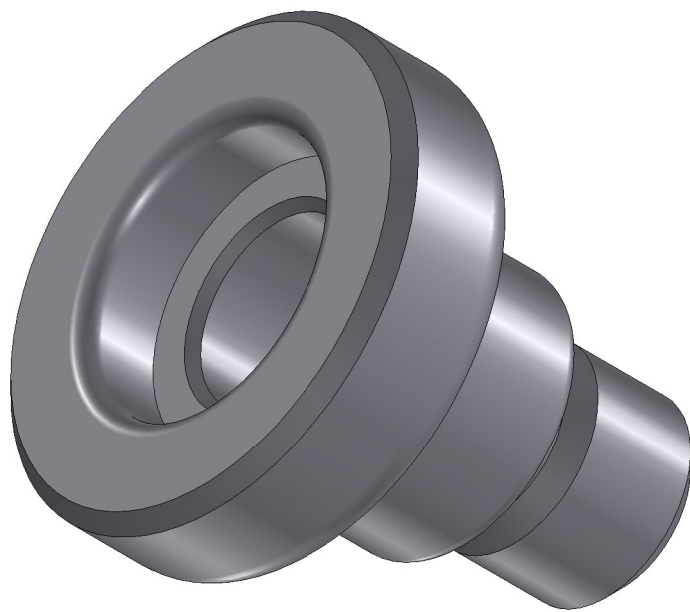

- NOTES:
1. MAKE FROM 8620 OR 86L20.
 2. TUMBLE DEBURR PRIOR TO SHIPPING.
 3. COMPLETE INSPECTION RECORDS REQUIRED.
 4. SOLID MODEL AVAILABLE UPON REQUEST - CONTACT DEAN DUPLESS AT DEDUPLESSIS@NMCC.EDU
 5. SPECIFY SOLID MODEL FORMAT REQUIREMENTS.

DRAWN: Dean Duplessis - 8/18/2008

APPROVED:



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
DIMENSION TOLERANCES ARE:
XX ±.010
.XXX ±.005
FRACTIONS ±1/64
ANGLES ±0.5°

BREAK ALL CORNERS AND SHARP EDGES
SURFACE FINISH 64

INTERPRET PER ASME Y14.5M-1994

REV	REV
SH	STATUS

Northern Maine Community College
HAAS Technical Education Center

TITLE
THERMAL SEAL PLUG

SIZE	CAGE CODE	DWG NO	REV
C		PMM-C-223-2	A

SCALE: 2:1 SHEET: 1 OF 1